
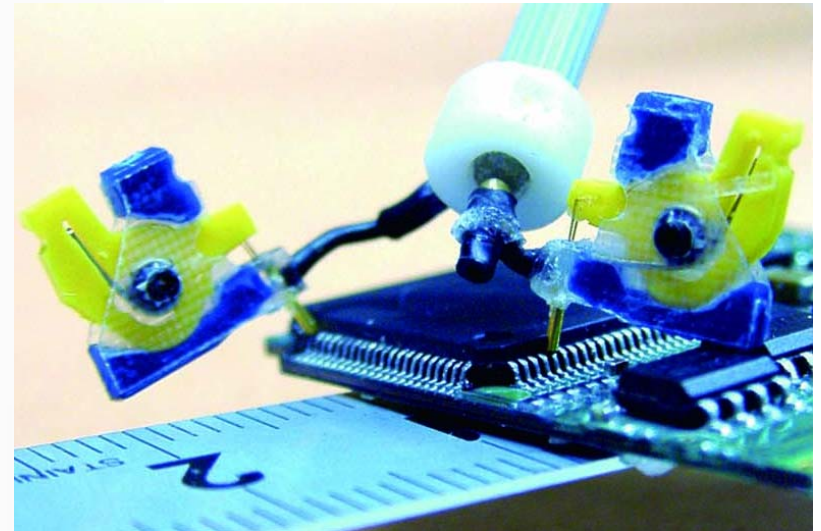


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	11/13/08	JAG

**NOTES**

1. Bandwidth: HIGH-SPEED, DC ~GHz
2. Length of current-carrying part: 12mm
3. Conductor resistance: 7mΩ
4. Contact resistance: 10mΩ
5. Withstanding voltage: 80VDC
6. Operating temperature rating: 0°C ~ 80°C (no condensation)

The use of a magnifying glass is advised when looking at the tip.

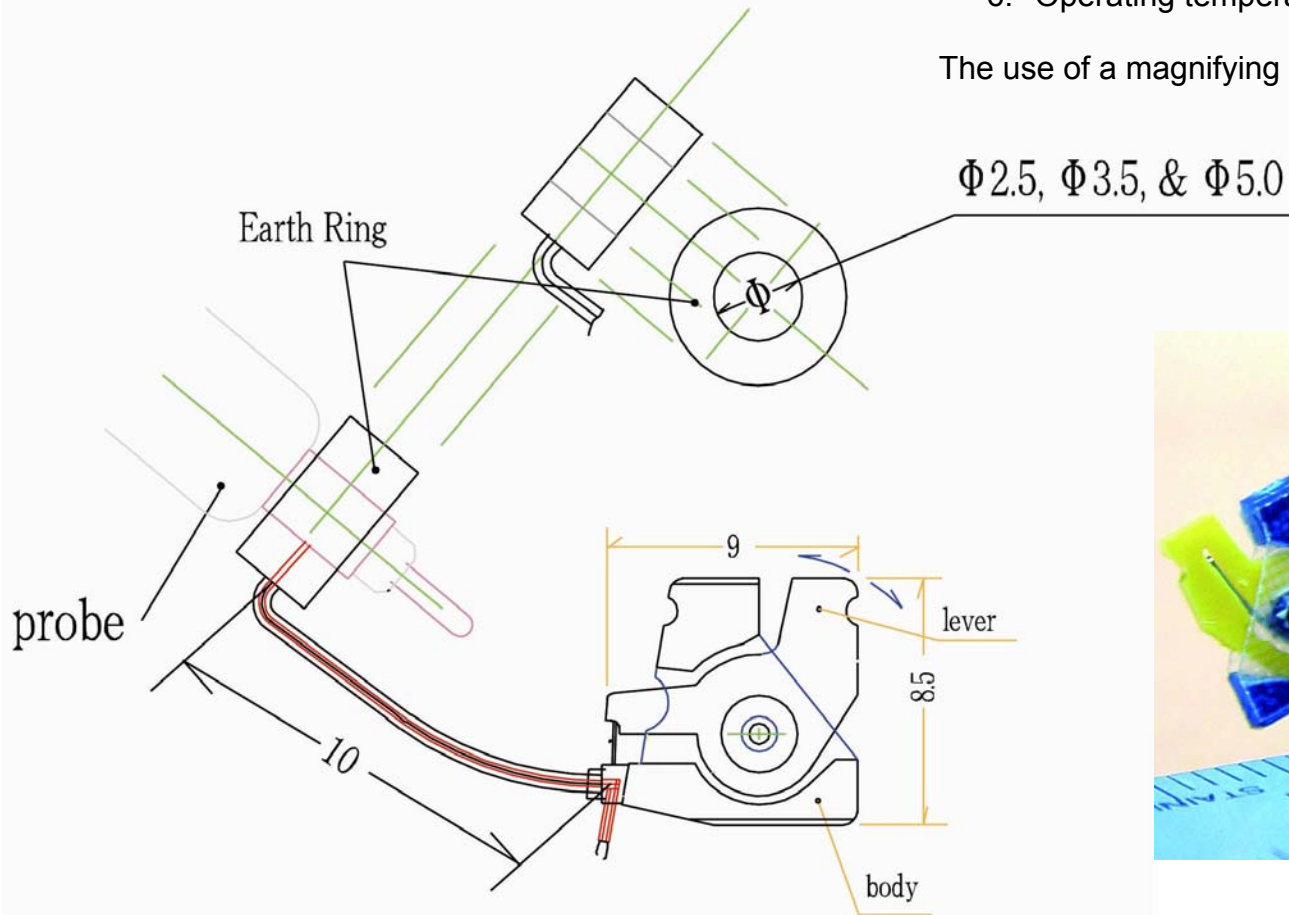

Item #	Accessible IC Pitch	Earth Ring $\Phi$	Color	
			Body	Lever
FPN-CCM25	0.65 ~ 1.25	2.5	Blue	Yellow
FPN-CCM35	0.65 ~ 1.25	3.5	Blue	Yellow
FPN-CCM50	0.65 ~ 1.25	5.0	Blue	Yellow
FPN-CCS25	0.3 ~ 0.65	2.5	Red	Yellow
FPN-CCS35	0.3 ~ 0.65	3.5	Red	Yellow
FPN-CCS50	0.3 ~ 0.65	5.0	Red	Yellow

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

**EMULATION TECHNOLOGY, INC.**  
 — VLSI and SMT ADAPTERS and ACCESSORIES —

759 FLYNN ROAD  
 CAMARILLO, CA 93012

TEL: (805) 383-8480  
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 11/13/08	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED:	PREPARED BY: J. GELACIO	ITEM: FPN-CCXY	DESCRIPTION: COAXIAL EARTH

**DO NOT SCALE DRAWING**